

You're Going to Love Our Steel Conduit

Our GRC is produced using a hot-reduction method that allows the steel to normalize creating ideal qualities for the conduction of liquids and gases. Once the steel is normalized it acquires superior malleability for bending and threading the product.



Cal Pipe's GRC ...

... is hot-dip galvanized, guaranteeing uniform interior and exterior surface coating to provide superior corrosion resistance.

Great QA ...

Strict quality control using hydrostatic and eddy current tests, among others, ensures compliance with domestic and international quality standards.

And ...

Our NAFTA Steel Conduit is **FAR** and **BUY AMERICAN** compliant. See www.steelconduit.com for details.



5650 Washburn Road
Downey, CA 90241
Phone 562 803-3665
Fax 562-803-3667
www.webendpipe.com

Cal Pipe manufacturing

Rigid Metal Conduit & Conduit Fittings Huge Volume, Fast Delivery, and Great Value!

Cal Pipe's Hot-Dipped Rigid Steel Conduit meets the latest Underwriters' Laboratories UL-6 Standards 


800 225-7473
west coast

800-536-2248
midwest & east coast



CAL PIPE'S RIGID METAL CONDUIT

Huge Volume, Great Prices

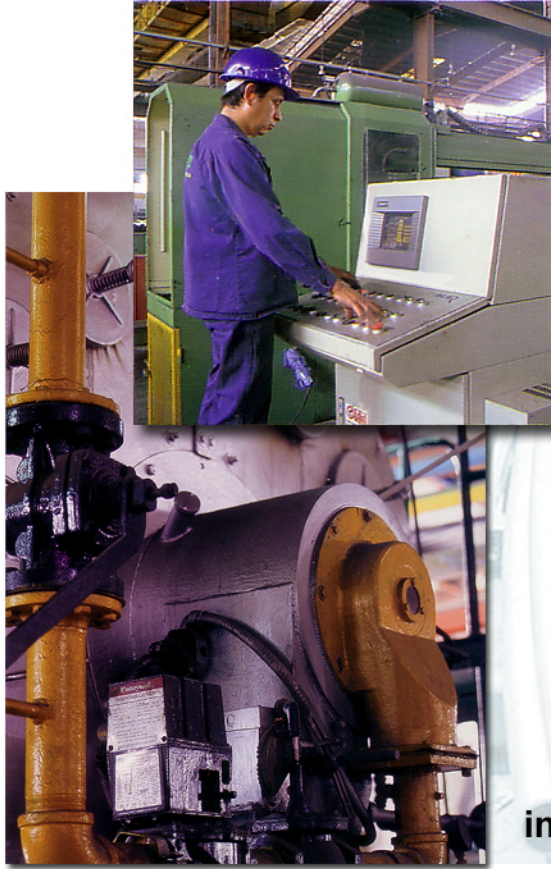

Cal Pipe's Hot-Dipped Steel Conduit meets the latest Underwriter's UL6 Standards

Availability September 2004

Size	Available Stock Laredo, TX	Available Stock Los Angeles, CA	Available Stock Hamond, IN
½	147,500	17,500	20,000
¾	46,000	46,000	36,000
1	145,200	9,600	7,200
1¼	78,300	5,400	3,600
1½	51,200	4,000	4,800
2	3,600	7,200	6,600
2½	30,340	740	740
3	7,200	0	2,700
4	13,000	2,600	1,800
5	Call	Call	Call
6	Call	Call	Call

Call 800-255-7473 (California), or 800-536-2248 (Indiana) for pricing.

Or, email info@calpipe.com



DIMENSIONS & WEIGHTS

Trade Size of Conduit	Outside Diameter Inches	Wall Thickness Inches	Length (With Coupling)	Approximate Weight Per 10 Lengths with Couplings	Quantity in Primary Bundle Feet	Quantity in Master Bundle Feet	Approx. Weight of Master Bundle
½	0.840	0.104	10	82	100	2,500	2,000
¾	1.050	0.107	10	108	50	2,000	2,160
1	1.315	0.126	10	160	50	1,200	1,920
1¼	1.660	0.133	10	217	30	900	1,953
1½	1.900	0.138	10	260	-	800	2,080
2	2.375	0.146	10	348	-	600	2,088
2½	2.875	0.193	10	553	-	370	2,046
3	3.500	0.205	10	722	-	300	2,166
4	4.500	0.225	10	1028	-	200	2,056
5	5.563	0.245	10	1400	-	150	2,100
6	6.625	0.266	10	1840	-	100	1,840

- Notes: 1. Orders sold by 100 feet. **Bundle quantities only.**
 2. Truck load quantities are full freight allowed. (**20 bundle minimum**)
 3. This is a **NAFTA** product, the mill is ISO9000 & UL6 listed.
 4. Conduit is **BUY AMERICAN ACT & FAR** compliant, details: www.steelconduit.com.

9650 Washburn Road • DOWNEY, CA 90241 • TEL (562) 803-4388 • FAX (562) 803-9883
 2207 165th Street • HAMMOND, IN 46320 • TEL (219) 844-6800 • FAX (219) 8446884